



ZHEJIANG JIANFENG SMART TECH CO.,LTD
JIANGSU JIANFENG IMPORT&EXPORT CO.,LTD

📍 Add: Building5, No.529, Cangling Road, Huzhen Town, Jinhua City, Zhejiang Province

✉ Email: vivian@ycjianfeng.com

🌐 Web: www.ycjianfeng.com

📞 Mobile/Wechat/Whatsapp: +86 13758990304

📘 Facebook/Linked: [vivian@ycjianfeng.com](https://www.facebook.com/vivian@ycjianfeng.com)




JIANFENG
GARDEN
TOOLS

For Notes

A series of horizontal dotted lines for taking notes, set against a background image of a green landscape with rolling hills and a single tree in the foreground.

Product catalog

Company Introduction	1-2
Gasoline Chain Saw	3-8
Gasoline Brush Cutter	9-12
Gasoline series 4 in 1	13-14
Planter&Ice driller&Earth auger	15-16
Mini Tiller	17-18
Gasoline/Cordless Snow Remover	19-20
Cordless Chain Saw	21-24
Cordless Brush Cutter	25-26

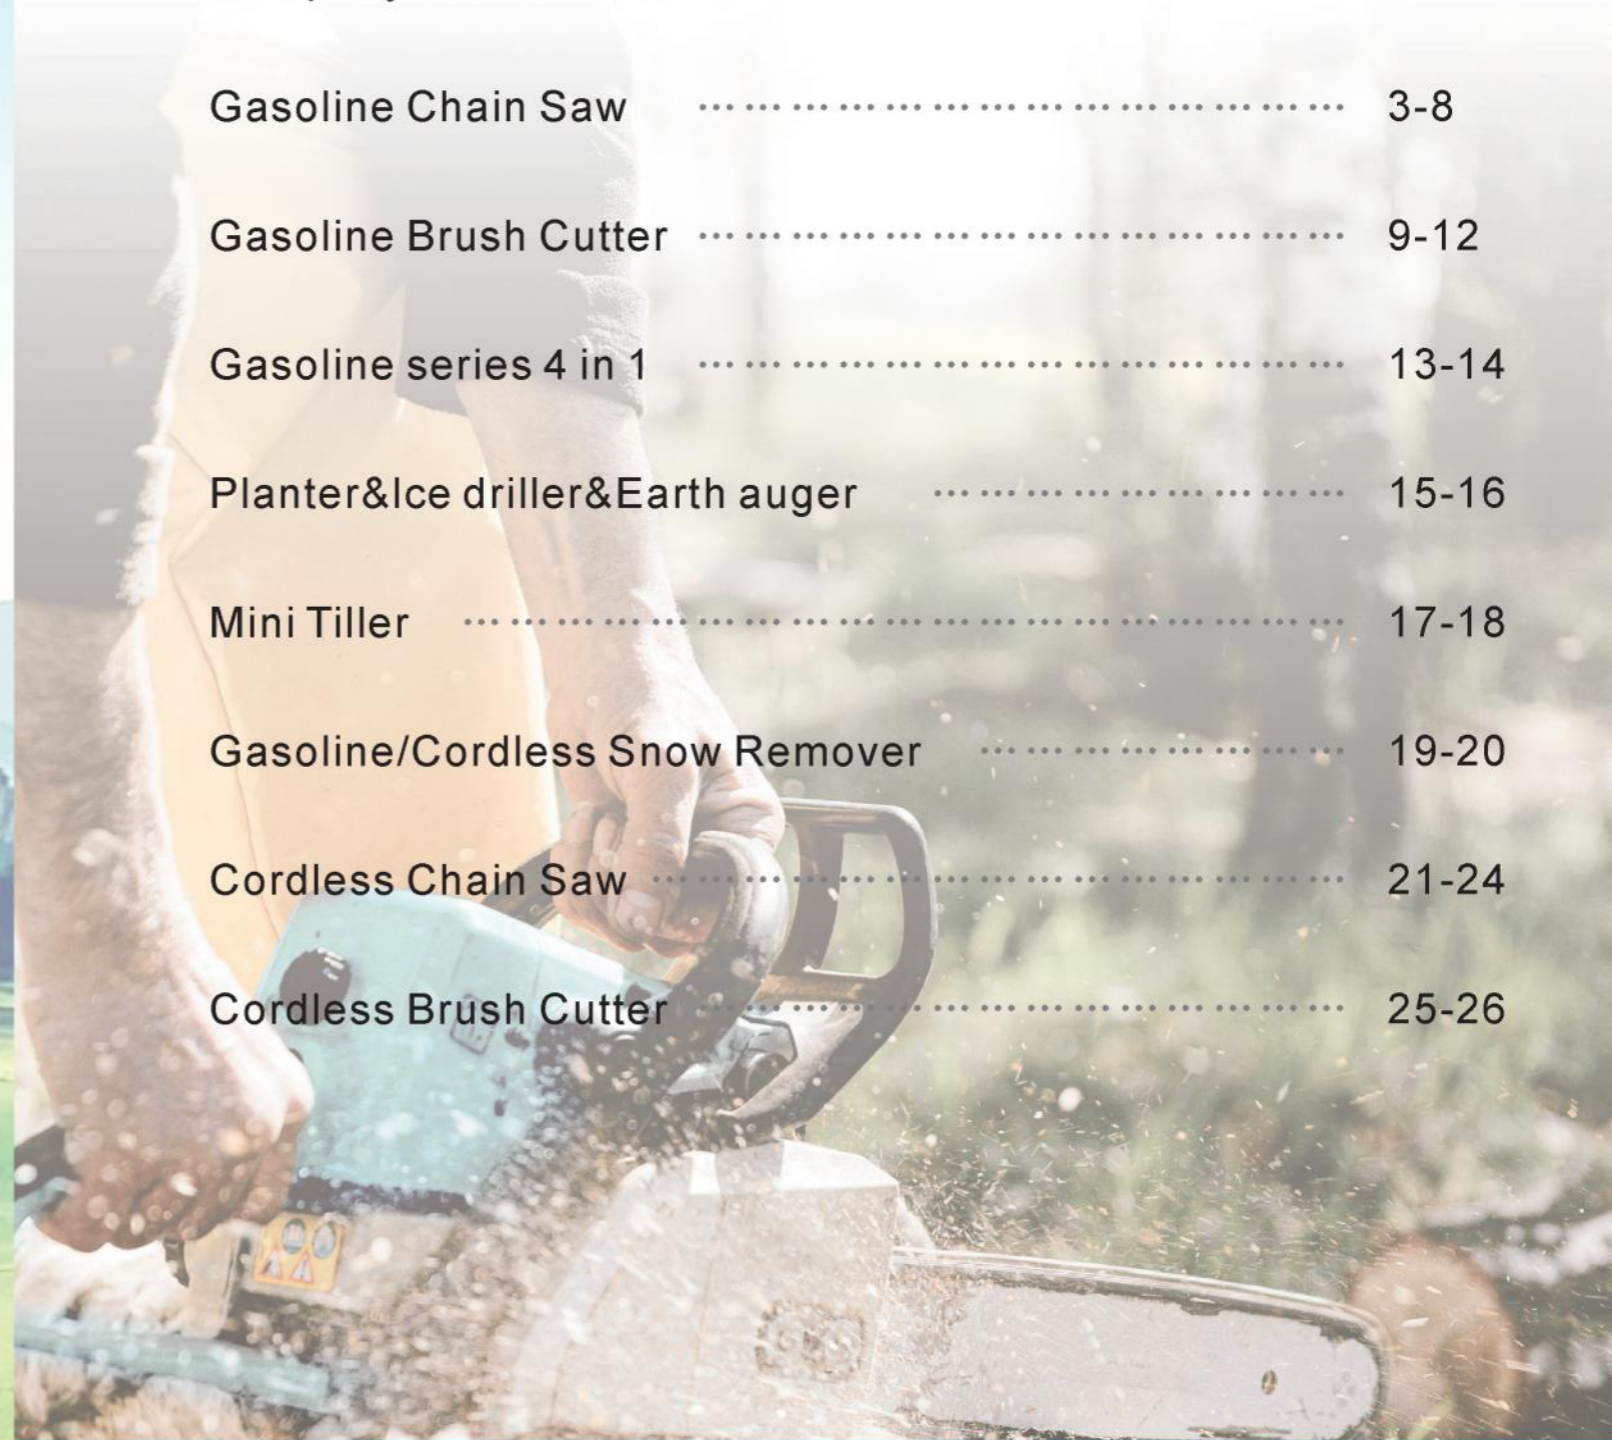

COMPANY INTRO

ZHEJIANG JIANFENG

Zhejiang Jianfeng Smart Tech Co., Ltd. (formerly Yongkang Jianfeng Power Tools Co., Ltd.), based in Huzhen Town, Jinyun City, Zhejiang Province, is dedicated to advancing the future of garden and power tools. Specializing in innovative garden solutions, lithium battery-powered equipment, and wired electric tools, we combine technology and craftsmanship to make work safer, smarter, and more efficient.

Our 20,000 m² modern facility is home to hundreds of skilled professionals, supported by a strong R&D and quality control team. With fully equipped injection molding workshops, battery production, assembly, and automated packing lines, we maintain strict control at every stage of production.

More than 20 patented innovations, along with CE, EMC, ISO9001, and ISO14001 certifications, ensure our products meet the highest international standards for quality, safety, and environmental responsibility.

Today, Jianfeng Smart Tech is a trusted partner to customers worldwide — delivering reliable tools that empower industries, support sustainability, and help people achieve more every day.

COMPANY INTRO

JIANGSU JIANFENG

Jiangsu Jianfeng Import & Export Co., Ltd. is an integrated industry and trade company with over 20 years of experience in manufacturing and global export. We specialize in international procurement, export business, transaction audits, and factory verification, providing our partners with safe, transparent, and reliable trade services.

Backed by Sinosure credit insurance, we ensure secure payments and reduced financial risk in cross-border transactions. Our product portfolio covers a full range of tools — including AC tools, power tools, garden tools, air tools, hand tools, tool sets, and accessories. We support flexible order quantities, worldwide brand agency partnerships, and ready-to-ship delivery, making it easier for customers to do business with us.

Each year, we ship over 300 containers to more than 30 countries across South Europe, Southeast Asia, the Middle East, Africa, and South America, with strong presence in markets such as Brazil, Russia, Kazakhstan, Ukraine, Mexico, and the UAE. Our dual sales model — OEM manufacturing and our own brand distribution — allows us to meet diverse customer needs with competitive pricing and reliable quality.

At Jiangsu Jianfeng, we pride ourselves on delivering cost-effective, high-quality products and dependable service. Our mission is simple: to help global customers grow their business with tools and solutions they can trust.



FACTORY BUILDING



PRODUCTION LINE



WAREHOUSE



CERTIFICATION



PACKING LINE



JFGCS001	
Engine Type:	air-cooled,2 stroke
Displacement:	36.3cc
Power:	1.2kw/1.6HP
Fuel tank capacity:	0.31L
Oil tank capacity:	0.3L
Bar length:	12"/14"/16"/18"
Chain size:	3/8 "P,0.050"G
Idling speed:	3200±200r/min



JFGCS002	
Engine:	air-cooled,2 stroke(single cylinder)
Displacement:	52cc/58cc
Power:	2.4kw/8500r/min
Idling speed:	2800±150r/min
Fuel tank capacity:	550ml
Oil tank capacity:	260ml
Bar length:	16"/18"
G.W./N.W.:	8.0kg/5.5kg
Max cutting diameter:	20"(50cm) 22"(55cm)
Fuel mix ratio:	25:1(Gasoline 25:Two-Cycle Oil 1)



JFGCS003	
Engine Type:	air-cooled,2 stroke(single cylinder)
Displacement:	52cc/58cc
Power:	2.4kw/8500r/min
Idling speed:	2800±150r/min
Fuel tank capacity:	550ml
Oil tank capacity:	260ml
Bar length:	16"/18"
G.W./N.W.:	8.0kg/5.5kg
Max cutting diameter:	20"(50cm) 22"(55cm)
Fuel mix ratio:	25:1(Gasoline 25:Two-Cycle Oil 1)



JFGCS004	
Engine Type:	air-cooled,2 stroke(single cylinder)
Displacement:	52cc/58cc
Power:	2.4kw/8500r/min
Idling speed:	2800±150r/min
Fuel tank capacity:	550ml
Oil tank capacity:	260ml
Bar length:	16"/18"
G.W./N.W.:	8.0kg/5.5kg
Max cutting diameter:	20"(50cm) 22"(55cm)
Fuel mix ratio:	25:1(Gasoline 25:Two-Cycle Oil 1)



JFGCS005	
Engine Type:	air-cooled,2 stroke(single cylinder)
Displacement:	52cc/58cc
Power:	2.4kw/8500r/min
Idling speed:	2800±150r/min
Fuel tank capacity:	550ml
Oil tank capacity:	260ml
Bar length:	16"/18"
G.W./N.W.:	8.0kg/5.5kg
Max cutting diameter:	20"(50cm) 22"(55cm)
Fuel mix ratio:	25:1(Gasoline 25:Two-Cycle Oil 1)



JFGCS006	
Engine Type:	air-cooled,2 stroke(single cylinder)
Displacement:	52cc/58cc
Power:	2.4kw/8500r/min
Idling speed:	2800±150r/min
Fuel tank capacity:	550ml
Oil tank capacity:	260ml
Bar length:	16"/18"
G.W./N.W.:	8.0kg/5.5kg
Max cutting diameter:	20"(50cm) 22"(55cm)
Fuel mix ratio:	25:1(Gasoline 25:Two-Cycle Oil 1)



JFGCS007	
Engine Type:	air-cooled,2 stroke(single cylinder)
Displacement:	52cc/58cc
Power:	2.4kw/8500r/min
Idling speed:	2800±150r/min
Fuel tank capacity:	550ml
Oil tank capacity:	260ml
Bar length:	16"/18"
G.W./N.W.:	8.0kg/5.5kg
Max cutting diameter:	20"(50cm) 22"(55cm)
Fuel mix ratio:	25:1(Gasoline 25:Two-Cycle Oil 1)



JFGCS010	
Engine Type:	air-cooled,2 stroke(single cylinder)
Displacement:	52cc/58cc
Power:	2.4kw/8500r/min
Idling speed:	2800±150r/min
Fuel tank capacity:	550ml
Oil tank capacity:	260ml
Bar length:	16"/18"
G.W./N.W.:	8.0kg/5.5kg
Max cutting diameter:	20"(50cm) 22"(55cm)
Fuel mix ratio:	25:1(Gasoline 25:Two-Cycle Oil 1)



JFGCS008	
Engine Type:	air-cooled,2 stroke(single cylinder)
Displacement:	52cc/58cc
Power:	2.4kw/8500r/min
Idling speed:	2800±150r/min
Fuel tank capacity:	550ml
Oil tank capacity:	260ml
Bar length:	16"/18"
G.W./N.W.:	8.0kg/5.5kg
Max cutting diameter:	20"(50cm) 22"(55cm)
Fuel mix ratio:	25:1(Gasoline 25:Two-Cycle Oil 1)



JFGCS011	
Engine Type:	air-cooled,2 stroke(single cylinder)
Displacement:	52cc/58cc
Power:	2.4kw/8500r/min
Idling speed:	2800±150r/min
Fuel tank capacity:	550ml
Oil tank capacity:	260ml
Bar length:	16"/18"
G.W./N.W.:	8.0kg/5.5kg
Max cutting diameter:	20"(50cm) 22"(55cm)
Fuel mix ratio:	25:1(Gasoline 25:Two-Cycle Oil 1)



JFGCS009	
Engine Type:	air-cooled,2 stroke(single cylinder)
Displacement:	52cc/58cc
Power:	2.4kw/8500r/min
Idling speed:	2800±150r/min
Fuel tank capacity:	550ml
Oil tank capacity:	260ml
Bar length:	16"/18"
G.W./N.W.:	8.0kg/5.5kg
Max cutting diameter:	20"(50cm) 22"(55cm)
Fuel mix ratio:	25:1(Gasoline 25:Two-Cycle Oil 1)



JFGCS012	
Engine Type:	air-cooled,2 stroke(single cylinder)
Displacement:	52cc/58cc
Power:	2.4kw/8500r/min
Idling speed:	2800±150r/min
Fuel tank capacity:	550ml
Oil tank capacity:	260ml
Bar length:	16"/18"
G.W./N.W.:	8.0kg/5.5kg
Max cutting diameter:	20"(50cm) 22"(55cm)
Fuel mix ratio:	25:1(Gasoline 25:Two-Cycle Oil 1)



JFGCS013	
Engine Type:	air-cooled,2 stroke(single cylinder)
Displacement:	52cc/58cc
Power:	2.4kw/8500r/min
Idling speed:	2800±150r/min
Fuel tank capacity:	550ml
Oil tank capacity:	260ml
Bar length:	16"/18"
G.W./N.W.:	8.0kg/5.5kg
Max cutting diameter:	20"(50cm) 22"(55cm)
Fuel mix ratio:	25:1(Gasoline 25:Two-Cycle Oil 1)



JFGCS016	
Engine Type:	air-cooled,2 stroke(single cylinder)
Displacement:	52cc/58cc
Power:	2.4kw/8500r/min
Idling speed:	2800±150r/min
Fuel tank capacity:	550ml
Oil tank capacity:	260ml
Bar length:	16"/18"
G.W./N.W.:	8.0kg/5.5kg
Max cutting diameter:	20"(50cm) 22"(55cm)
Fuel mix ratio:	25:1(Gasoline 25:Two-Cycle Oil 1)



JFGCS014	
Engine Type:	air-cooled,2 stroke(single cylinder)
Displacement:	52cc/58cc
Power:	2.4kw/8500r/min
Idling speed:	2800±150r/min
Fuel tank capacity:	550ml
Oil tank capacity:	260ml
Bar length:	16"/18"
G.W./N.W.:	8.0kg/5.5kg
Max cutting diameter:	20"(50cm) 22"(55cm)
Fuel mix ratio:	25:1(Gasoline 25:Two-Cycle Oil 1)



JFGCS015	
Engine Type:	air-cooled,2 stroke(single cylinder)
Displacement:	52cc/58cc
Power:	2.4kw/8500r/min
Idling speed:	2800±150r/min
Fuel tank capacity:	550ml
Oil tank capacity:	260ml
Bar length:	16"/18"
G.W./N.W.:	8.0kg/5.5kg
Max cutting diameter:	20"(50cm) 22"(55cm)
Fuel mix ratio:	25:1(Gasoline 25:Two-Cycle Oil 1)





JFGBC001	
Engine Model:	1E36F
Engine Type:	single cylinder/air-cooled/two stroke
Power:	0.8KW/6500RPM
Displacement:	32.5CC
Fuel mix ratio:	25:1
Carburetor Type:	diaphragm
Idle speed:	2800-3200r/min
Fuel tank capacity:	1.2L
Pole diameter:	28mm/26mm
N.W./G.W.:	8.5kg/11kg
Carry method:	Side hang



JFGBC002	
Engine Model:	1E40F-5
Engine Type:	single cylinder/air-cooled/two stroke
Power:	1.4KW/7000RPM
Displacement:	43CC
Fuel mix ratio:	25:1
Carburetor Type:	diaphragm
Idle speed:	2800-3200r/min
Fuel tank capacity:	1.2L
Pole diameter:	28mm/26mm
N.W./G.W.:	7.5kg/10kg
Carry method:	Side hang



JFGBC003	
Engine Model:	1E40F-5
Engine Type:	single cylinder/air-cooled/two stroke
Power:	1.4KW/7000RPM
Displacement:	43CC
Fuel mix ratio:	25:1
Carburetor Type:	diaphragm
Idle speed:	2800-3200r/min
Fuel tank capacity:	1.2L
Pole diameter:	28mm/26mm
N.W./G.W.:	7.5kg/10kg
Carry method:	Side hang



JFGBC004	
Engine Model:	1E40F-5/1E44-5F
Engine Type:	single cylinder/air-cooled/two stroke
Power:	1.6KW/7500RPM
Displacement:	32.5CC/43CC/52CC
Fuel mix ratio:	25:1
Carburetor Type:	diaphragm
Idle speed:	2800-3200r/min
Fuel tank capacity:	1.2L
Pole diameter:	28mm/26mm
N.W./G.W.:	8.5kg/11kg
Carry method:	Side hang



JFGBC005	
Engine Model:	1E139F
Engine Type:	single cylinder/air-cooled/four stroke
Power:	0.85KW/7000RPM
Displacement:	39CC
Fuel mix ratio:	gasoline
Carburetor Type:	diaphragm
Idle speed:	2800-3200r/min
Fuel tank capacity:	1.2L
Pole diameter:	28mm/26mm
N.W./G.W.:	7.5kg/10kg
Carry method:	Side hang



JFGBC006	
Engine Model:	1E140F
Engine Type:	single cylinder/air-cooled/four stroke
Power:	0.9KW/7000RPM
Displacement:	40CC
Fuel mix ratio:	gasoline
Carburetor Type:	diaphragm
Idle speed:	2800-3200r/min
Fuel tank capacity:	1.2L
Pole diameter:	28mm/26mm
N.W./G.W.:	7.5kg/10kg
Carry method:	Side hang



JFGBC007	
Engine Model:	1E44F-5
Engine Type:	single cylinder/air-cooled/two stroke
Power:	1.6KW/7000RPM
Displacement:	45CC/52CC
Fuel mix ratio:	25:1
Carburetor Type:	diaphragm
Idle speed:	2800-3200r/min
Fuel tank capacity:	0.7L
Pole diameter:	26mm
N.W./G.W.:	10.5kg/13kg
Carry method:	backpack



JFGBC008	
Engine Model:	1E139F
Engine Type:	single cylinder/air-cooled/four stroke
Power:	0.85KW/7000RPM
Displacement:	39CC
Carburetor Type:	diaphragm
Idle speed:	2800-3200r/min
Fuel tank capacity:	0.7L
Pole diameter:	26mm
N.W./G.W.:	10.5kg/13kg
Carry method:	backpack



JFGBC009	
Engine Model:	140F
Engine Type:	single cylinder/air-cooled/four stroke
Power:	0.8KW/6500RPM
Displacement:	40CC
Carburetor Type:	diaphragm
Idle speed:	2800-3200r/min
Fuel tank capacity:	0.65L
Pole diameter:	28mm/26mm
N.W./G.W.:	7.5kg/10kg
Carry method:	backpack

HIGH POWER TWO-STROKE SIDE-HANG

easy to start

high efficiency

low fuel consumption



JFGMT001

Engine:	1E36F(32.5cm ³ 2-cycle)	Pole Hedge Trimmer	Pole Hedge Trimmer
Max Output Power:	0.9KW/7000r/min	Blade Length:	400mm(16")
Idling Speed:	3000r/min±200	Working Angles:	7steps
Cutting Width Of Blade:	255mm	Pole saw	Pole saw
Cutting Width Of Trimmer:	440mm	Chain Speed:	7M/S
Tank Volume:	1L	Cutting Length:	200mm(8")
Shaft Tube Length:	1500mm		
Shaft Tube Diameter:	26/28mm		
Line:	2-2.4mm*3m		





JFEA001	
Engine Model:	1E44F-5
Engine Type:	single cylinder/air-cooled/two stroke
Power:	1.7KW/7000RPM
Displacement:	52CC
Fuel mix ratio:	25:1
Carburetor Type:	Diaphragm
Idling Speed:	2800-3200r/min
Drill diameter:	10/15/20cm



JFEA004	
Engine Model:	1E44F-5
Engine Type:	single cylinder/air-cooled/two stroke
Power:	1.7KW/9000RPM
Displacement:	52CC
Fuel mix ratio:	25:1
Carburetor Type:	Diaphragm
Idling Speed:	2800-3200r/min
Drill diameter:	80/100/120/150/200/250/300/400mm



JFEA002	
Engine Model:	1E44F-5
Engine Type:	single cylinder/air-cooled/two stroke
Power:	1.7KW/7000RPM
Displacement:	52CC
Fuel mix ratio:	25:1
Carburetor Type:	Diaphragm
Drilling Speed:	2800-3200r/min
Drill diameter:	80/100/120/150/200/250/300/400mm



JFEA003	
Engine Model:	1E48F
Engine Type:	single cylinder/air-cooled/two stroke
Power:	2.1KW/7000RPM
Displacement:	Displacement:63CC
Fuel mix ratio:	25:1
Carburetor Type:	Diaphragm
Drilling Speed:	2800-3200r/min
Drill diameter:	80/100/120/150/200/250/300/400mm



- efficient drilling
- widely application
- planting Trees and digging holes
- stake digging
- engineering drilling
- ice fishing hole



JFST001	
Engine Model:	1E44-5F
Engine Type:	single cylinder/air-cooled/2-stroke
Power:	1.6KW/7000RPM
Displacement:	53.2CC
Fuel mix ratio:	25:1
Carburetor Type:	Diaphragm



JFST002	
Engine Model:	144F
Engine Type:	single cylinder/air-cooled/4-stroke
Power:	2KW/7000RPM
Displacement:	53.2CC
Fuel mix ratio:	25:1
Carburetor Type:	Diaphragm



JFST003	
Engine Model:	1E48F
Engine Type:	single cylinder/air-cooled/2 stroke
Power:	2.4KW/7000RPM
Displacement:	63CC
Fuel mix ratio:	25:1
Carburetor Type:	Diaphragm

FOUR-STROKE TILLER

loosen the soil

weeding

land reclamation

paddy field



Suitable for all terrains



Hills



Orchard



Vegetable fields



Greenhouse



Mountain



Paddy



JFCSR001	
Battery Voltage:	21V
Power:	380W
Frequency:	50/60Hz
No-load speed:	5800r/min
Max throwing:	10-15m

JFGSR001	
Engine Model:	Engine Model:1E40F-5
Engine Type:	single cylinder/air-cooled/two stroke
Power:	1.4KW/7500RPM
Displacement:	43CC
Fuel mix ratio:	25:1
Carburetor Type:	diaphragm
Idle speed:	2800-3200r/min
Fuel tank capacity:	1.2L
Max throwing:	10-15m

JFGSR002	
Engine Model:	1E44F-5
Engine Type:	single cylinder/air-cooled/two stroke
Power:	1.4KW/7500RPM
Displacement:	52CC
Fuel mix ratio:	25:1
Carburetor Type:	diaphragm
Idle speed:	2800-3200r/min
Fuel tank capacity:	1.2L
Max throwing:	10-15m

LIGHT WEIGHT HANDHELD SNOW BLOWER



- portable and flexible
- strong cleaning power
- spiral snow sweeper



JFCCS001	
Brushless Motor	Brushless Motor
Battery Voltage:	42V
Output Power:	1800W
Cut diameter:	140mm
Guidebar:	16"
Chain speed:	9000RPM
overheating protection:	75°C
Secondary overload protection:	30A



JFCCS002	
Battery Voltage:	21V
Output Power:	700W
Cut diameter:	140mm
Guidebar:	12"
Chain speed:	8500RPM
overheating protection:	75°C
Secondary overload protection:	30A



JFCCS003	
Battery Voltage:	48V
Output Power:	1800W
Cut diameter:	140mm
Guidebar:	16"
Chain speed:	8000m/s
overheating protection:	75°C
Secondary overload protection:	30A



JFCCS004	
Battery Voltage:	21V
Output Power:	900W
Cut diameter:	140mm
Guidebar:	12"
Chain speed:	4500RPM
overheating protection:	75°C
Secondary overload protection:	30A



JFCCS005	
Battery Voltage:	21V
Output Power:	900W
Cut diameter:	140mm
Guidebar:	12"
Chain speed:	4500RPM
overheating protection:	75°C
Secondary overload protection:	30A



JFCCS006	
Battery Voltage:	21V
Output Power:	200W
Cut diameter:	140mm
Guidebar:	4"/6"
Chain speed:	1200RPM
overheating protection:	75°C
Secondary overload protection:	30A



JFCCS007	
Battery Voltage:	21V
Output Power:	500W
Cut diameter:	140mm
Guidebar:	8"
Chain speed:	1500RPM
overheating protection:	75°C
Secondary overload protection:	30A



JFCCS008	
Brushless Motor	Brushless Motor
Battery Voltage:	21V
Output Power:	800W
Cut diameter:	140mm
Guidebar:	8"
Chain speed:	2500RPM
overheating protection:	75°C
Secondary overload protection:	30A





JFST001	
Battery Voltage:	21V-30V
Power:	1200W
No-load speed:	24500RPM
Cutting capacity:	230mm
Metal telescopic tube:	16"(405mm)



JFCBC004	
Battery Voltage:	21V-30V
Power:	1800W
No-load speed:	6000RPM
Cutting capacity:	230mm
Metal telescopic tube:	16"(405mm)



JFST002	
Battery Voltage:	21V-30V
Power:	1800W
No-load speed:	6000RPM
Cutting capacity:	230mm
Metal telescopic tube:	16"(405mm)



JFST003	
Battery Voltage:	21V
Power:	1200W
No-load speed:	24500RPM
Cutting capacity:	230mm
Metal telescopic tube:	16"(405mm)



Accessories for choice

HANDLE-1	HANDLE-2	HANDLE-3	HANDLE-4
HANDLE-5	HANDLE-6	BELT-1	BELT-2
BELT-3	BELT-4	BELT-5	CONNECTOR-1(Steel)
CONNECTOR-2(Aluminum)	CONNECTOR-3(Aluminum)	NYLON LINE	NYLON HEAD
2T-RHOMBIC BLADE	2T-SQUARE BLADE	3T-BLADE	4T-BLADE
40T-BLADE	80T-BLADE	40T-ALLOY BLADE	BLADE COVER

